


### STEP 13


- A. Make a pencil mark on the launch lug line 4 inches from the rear of the rocket as shown.
- B. Apply white glue to the launch lug and place along the pencil line with one end even with the mark 4 inches from the rear of the rocket as shown.

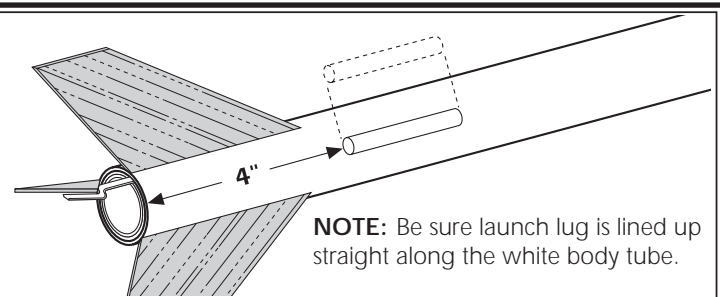

### STEP 14


- A. After all the glue is completely dry apply a coat of sanding sealer to each fin. When sealer is dry, lightly sand each fin.
- B. Repeat the sealing and sanding process until the surface of each fin is smooth.
- C. Paint the entire rocket body and fins with gloss white spray enamel. Follow instructions on the spray can for best results.

NOTE: For the best surface finish on your rocket, spray entire model with primer and sand before painting.

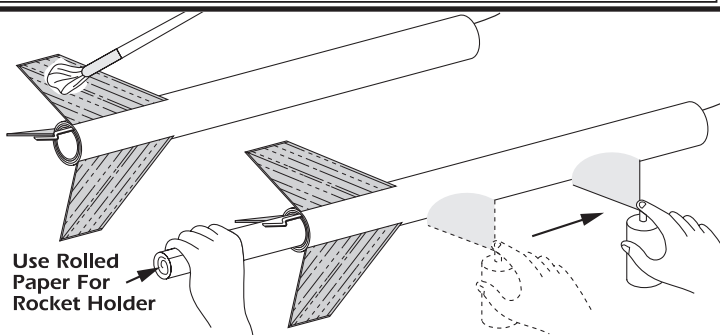

### STEP 15

- A. Wrap a layer of masking tape all the way around the shoulder of the nose cone. Spray paint the nose cone with several light coats of gloss blue paint.
- B. Apply masking tape around both sides of one body tube-fin joint. Protect the rest of the rocket with a plastic or paper bag. Spray paint one fin with several light coats of gloss blue paint. Carefully remove the masking tape after paint is dry.

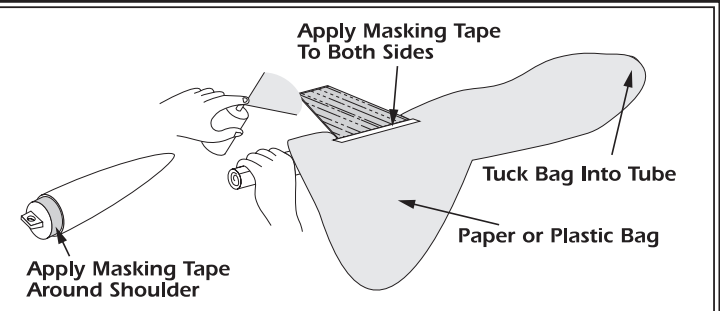


### STEP 16

- A. When all paint is dry, apply the self-adhesive decals as shown on the kit panel.
- NOTE: Use caution when removing the decal from the backing to prevent decal from curling over onto itself.





### STEP 17

- A. Apply gripper tabs to parachute so holes in gripper tabs line up with holes in parachute. Firmly squeeze each gripper tab and parachute between your fingers.
- B. Assemble the parachute by passing the end of a shroud line through a hole in a gripper tab and tying 2 overhand knots. Tie each of the 6 ends of shroud line to the parachute through the gripper tab holes.
- C. Assembled parachute should appear as shown.

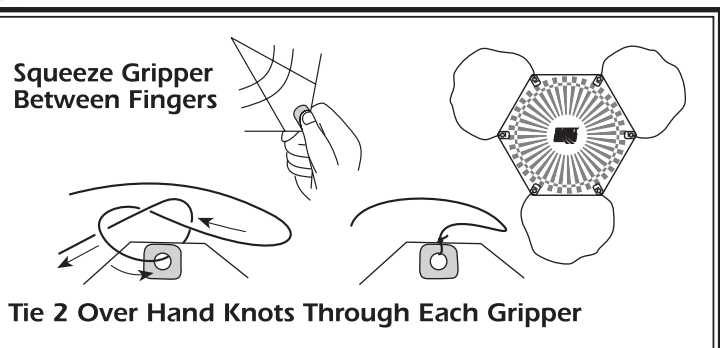


### STEP 18

- A. Pass the shroud line loops through the eyelet on the nose cone. Pass parachute through loop ends and pull lines tightly against the eyelet.
- B. Use two overhand knots to tie the loose end of the shock cord onto the base of the nose cone.

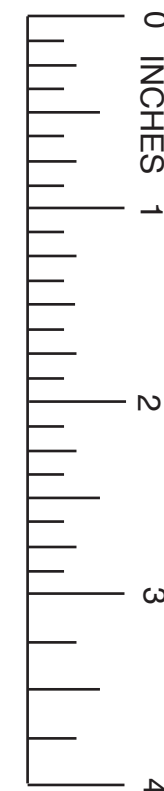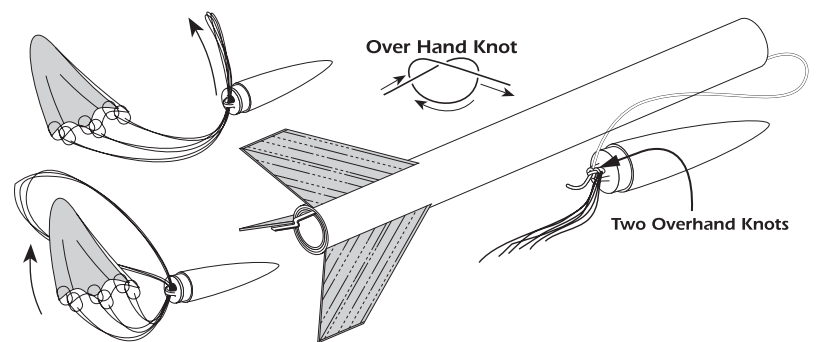

# Astra™ ASSEMBLY INSTRUCTIONS




Skill Level One



Things You'll Need To Assemble this Kit:  
Pencil and Paint Brush




Sandpaper (220 or 320 Grit) & Sanding Sealer



White Glue  
Aliphatic Resin glues work best such as TITEBOND or ELMER'S CARPENTER'S WOOD GLUE - ELMER'S WHITE SCHOOL GLUE also works but dries slower.



Tape & Paint  
Scotch Magic Tape or Paper Masking Tape and Spray Paint




**BEFORE STARTING ASSEMBLY READ THROUGH THESE INSTRUCTIONS. IT IS BEST TO TEST FIT ALL PARTS BEFORE APPLYING ANY GLUE. READ AND FOLLOW THE NAR MODEL ROCKET SAFETY CODE.**

### PARTS LIST


- A. 49000 Motor Clip
- B. 14000 Blue Thrust Ring
- C. 10303S Yellow Motor Mount Tube
- D. 14050 Red Centering Ring (2)
- E. 33000R Die-Cut Balsa Fin Set
- F. 11312 White Body Tube
- G. 20171 Plastic Nose Cone
- H. 10000 Launch Lug
- I. 50012 24 inch White Elastic Shock Cord
- J. 50051 18 inch Yellow Kevlar\* Shock Cord
- K. 82302 14 inch Parachute kit
- L. 91030 Self-Adhesive Decal
- M. 90052R Instruction Sheet
- N. 90152R Launch Procedures Sheet

\* Kevlar is a registered trademark of Dupont

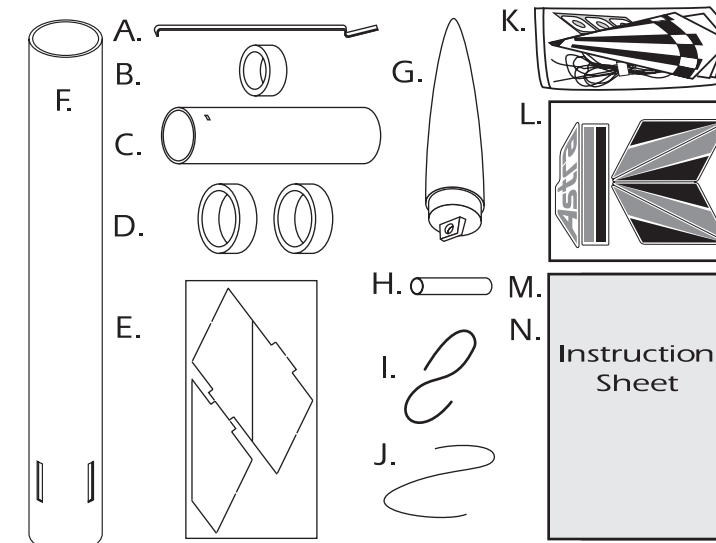


### STEP 1

- A. Place the Yellow Motor Mount Tube up against the ruler provided above. Make two pencil marks on the tube 1/2 inch from each end as shown.
- B. Make a slight bend in the Motor Clip as shown. Insert the Motor Clip into the slit in the Yellow Motor Mount Tube.

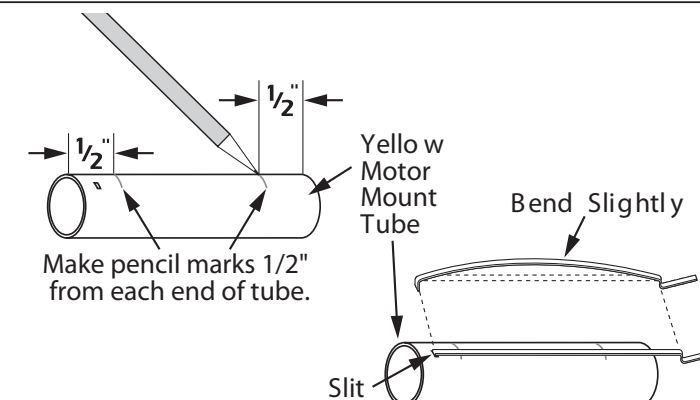

## STEP 2


A. Test fit one of the Red Centering Rings onto the Yellow Motor Mount Tube. If it does not slide on easily, stretch the Red Ring by sliding it over the Nose Cone and gently twisting it back and forth a few times. Slide the Red Ring onto the Yellow Tube just far enough to hold the Motor Clip in place.

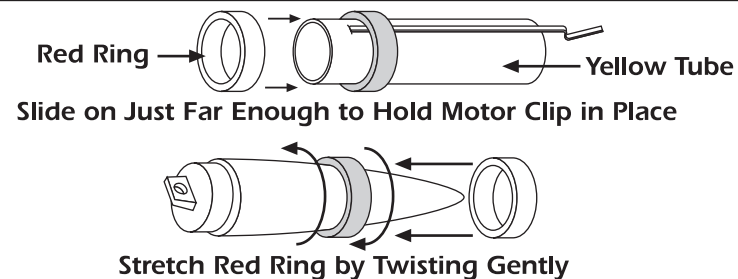

## STEP 3

A. Apply a bead of white glue around the Yellow Motor Mount Tube on the inside of the pencil mark made in Step 1, one half inch from the end as shown.

B. Slide the Red Ring into the bead of glue and up to the pencil mark. The edge of the Red Ring must be 1/2" from end of the Yellow Motor Mount Tube. Wipe away any excess glue.

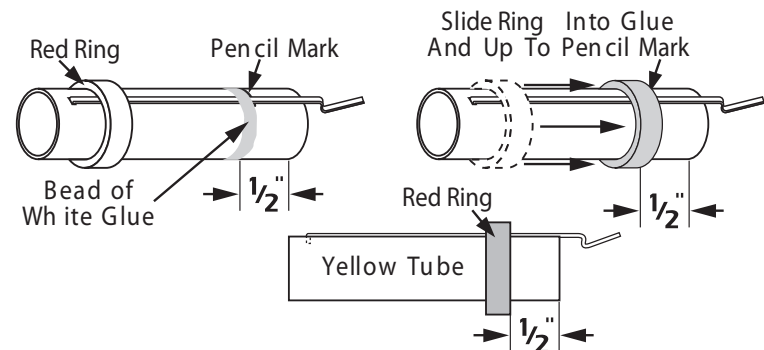


## STEP 4

A. Tie two overhand knots 1 inch in from the end of the Kevlar Cord.

B. Pass the end of the Kevlar with the knot through the remaining Red Centering Ring.

C. Slide the Red Centering Ring with the Kevlar under it onto the Yellow Motor Mount Tube.

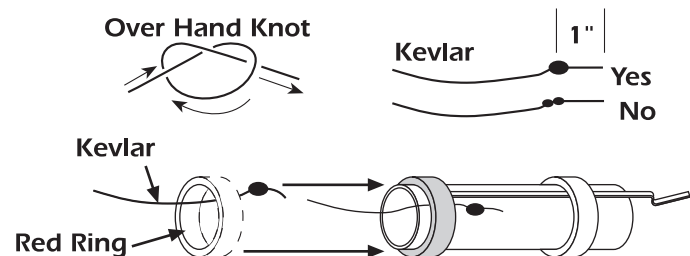


## STEP 5

A. Apply a bead of white glue around the Yellow Motor Mount Tube on the inside of the pencil mark made in Step 1, one half inch from the end as shown.

B. Slide the Red Ring into the bead of glue until the pencil mark is exposed. If the Red Ring is tight, stretch it as in step 2 above. The edge of the Red Ring must be 1/2" from end of the Yellow Motor Mount Tube. Wipe away any excess glue.


C. Pull the Yellow Kevlar Shock Cord up tight against the Red Centering Ring.

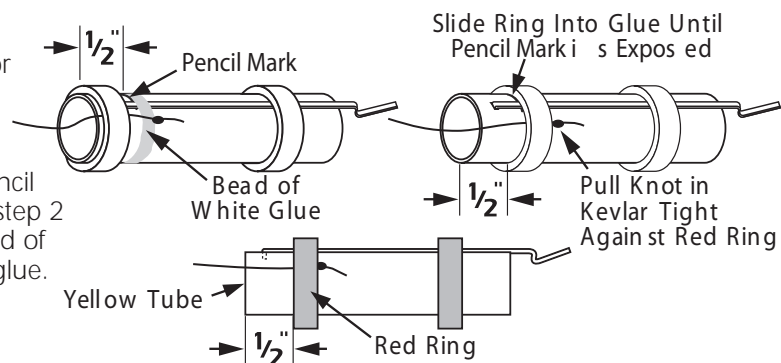

## STEP 6

A. Apply white glue around inside edge of Yellow Motor Mount Tube as shown,

B. Insert the Blue Thrust Ring into the Yellow Motor Mount Tube so it is even with the end of the Yellow Motor Mount Tube.

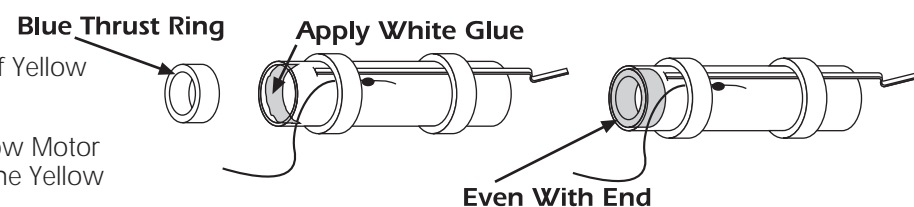


## STEP 7

A. Hold the Yellow Kevlar Shock Cord and the White Elastic Shock Cord side by side. Pull one end of each cord so that they are even with each other. While holding the two cords together, tie a single parallel overhand knot approximately one inch in from the even ends as shown.

B. Gently pull on both cords to set the knot and prevent it from slipping.

C. Apply a small amount of white glue on the ends of both cords to prevent them from fraying.

NOTE: THIS IS A VERY IMPORTANT STEP. IF YOU TIE A DIFFERENT TYPE OF KNOT THE SHOCK CORDS MAY SEPARATE DURING FLIGHT.

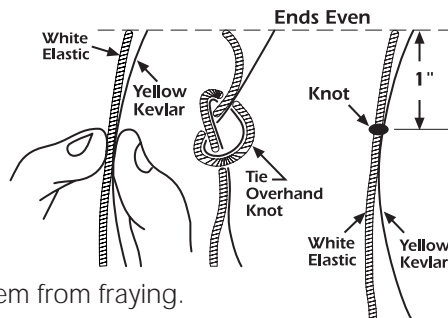


## STEP 8

A. Stretch the end of the Body Tube that has the Fin Slits in it slightly by inserting the nose cone into the tube and gently twisting it back and forth a few times.

B. Hold the Body Tube with the stretched end facing up and "feed" the shock cord into the tube until the cord comes out the other end.

C. Grab the end of the shock cord and pull it all the way through the tube until the Motor Mount assembly that is attached to the other end pulls up against the tube.

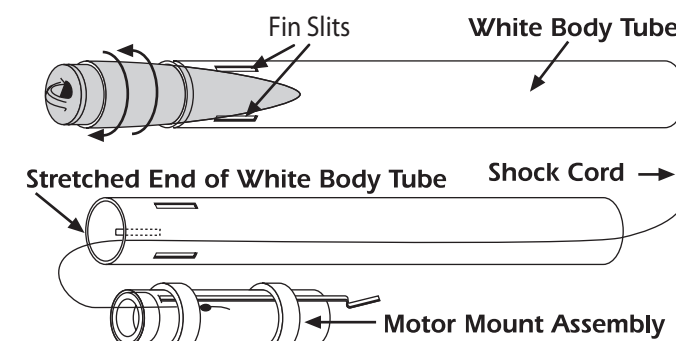


## STEP 9

A. Hold the Motor Mount Assembly and the Body Tube in one hand.

B. Apply White Glue around the inside of the Body Tube just beyond the Fin Slits.

C. Align the Motor Mount Assembly so the Motor Clip is centered between two of the Fin Slits.

D. Immediately insert the Motor Mount Assembly and PUSH IT INTO THE BODY TUBE WITH ONE FAST & SMOOTH MOTION until the Yellow Motor Mount Tube is even with the end of the Body Tube.

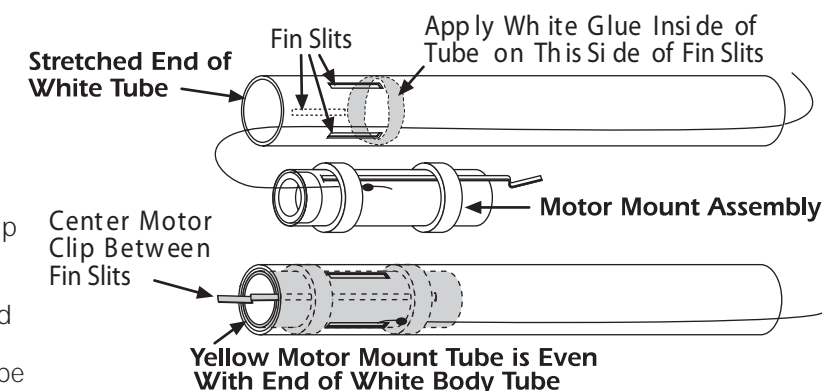


## STEP 10

A. Carefully remove each of the three die-cut balsa fins from the sheet with a sharp hobby knife.

B. Stack the fins together and sand all edges smooth.

C. Rub a small line of white glue into the root edge of each fin and set aside to dry.

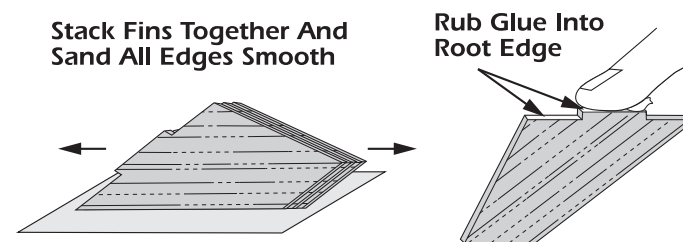

## STEP 12

A. Apply a small line of white glue along the root edge of a fin and position it into one of the fin slits in the body tube. Adjust the fin so that it projects straight away from the body tube as shown. Allow the glue to set for a few minutes before attempting to glue on the remaining fins. Repeat this step for the remaining two fins.

B. After the glue is completely dry apply a small bead of white glue to both sides of a fin-body tube joint. Smooth out the glue with your finger. Wipe excess glue off your finger onto a tissue or paper towel.

C. Repeat the above step for the remaining fin-body tube joints. Set aside to dry.

